

1

In the box there are the following items:

- FAN
- Plastic taps




2

Take the FAN and the four plastic taps. Plug them into the holes around the FAN like it is shown in pictures:




3

Position the fan on the cage and connect the cable to the motherboard, on the system fan

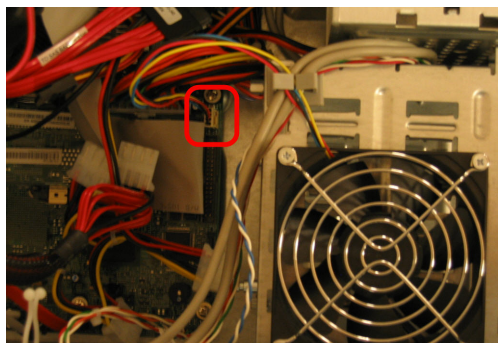

4

Push each plastic tap from the internal part of the cage to fix the FAN to the metal cage

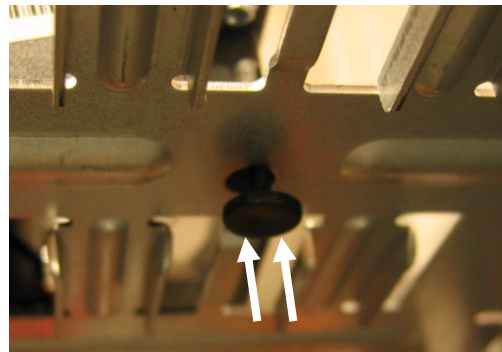

5

The system is now ready to use the additional FAN.

Please update the FRU/SDR in case BMC is installed in the system.